

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



10/521849



(43) International Publication Date  
12 February 2004 (12.02.2004)

PCT

(10) International Publication Number  
WO 2004/013876 A1

(51) International Patent Classification<sup>7</sup>: H01F 27/28,  
5/00, H02M 3/00, G06F 1/26

(21) International Application Number:  
PCT/IB2003/003237

(22) International Filing Date: 16 July 2003 (16.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
102 34 081.1 26 July 2002 (26.07.2002) DE

(71) Applicant (for DE only): PHILIPS INTELLECTUAL  
PROPERTY & STANDARDS GMBH [DE/DE]; Stein-  
damm 94, 20099 Hamburg (DE).

(71) Applicant (for all designated States except DE, US):  
KONINKLIJKE PHILIPS ELECTRONICS N.V.  
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven  
(NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): TOLLE, Tobias,  
Georg [DE/DE]; c/o Philips Intellectual Property &  
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).

DUERBAUM, Thomas [DE/DE]; c/o Philips Intellectual  
Property & Standards GmbH, Weissshausstr. 2, 52066  
Aachen (DE). ELFERICH, Reinhold [DE/DE]; c/o  
Philips Intellectual Property & Standards GmbH, Weis-  
shausstr. 2, 52066 Aachen (DE).

(74) Agent: VOLMER, Georg; Philips Intellectual Property &  
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: DEVICE COMPRISING A CIRCUIT ARRANGEMENT WITH AN INDUCTIVE ELEMENT

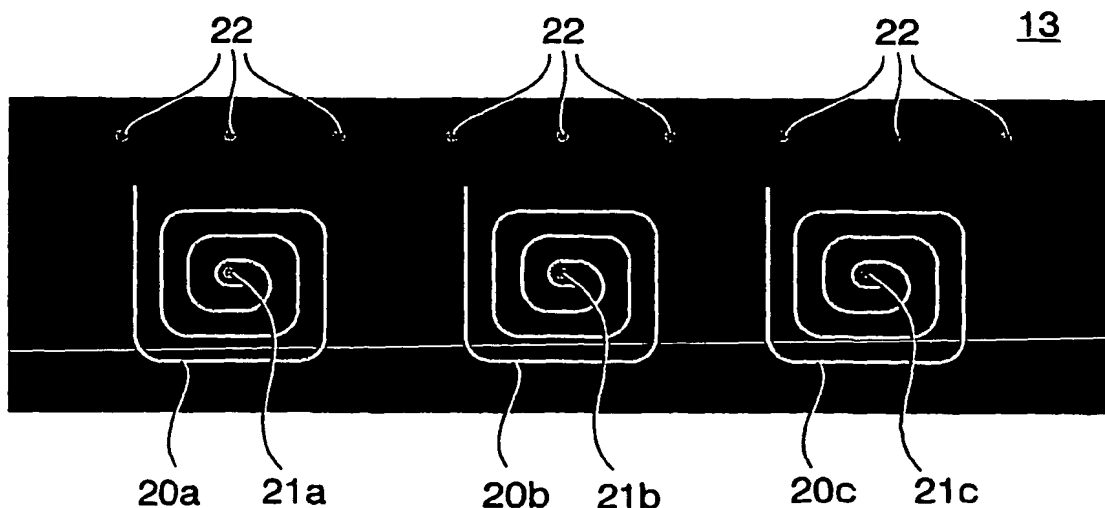

(57) Abstract: The invention relates to a device which comprises a circuit arrangement and at least one inductive element. In order to form a device with a circuit arrangement with one or more inductive elements which can be manufactured as economically as possible, it is proposed to use an electrically conductive plate (13) having an inductive function, the inductive function corresponding to a structure of slits (20a,20b,20c) formed in the plate.

WO 2004/013876 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Device comprising a circuit arrangement with an inductive element

The invention relates to a device which comprises a circuit arrangement and at least one inductive element. Inductive elements such as coils come in numerous shapes and forms, for example, as windings provided on a coil former. The invention relates notably to the field of power supply devices which often utilize inductive elements which have a significant effect on the cost of manufacture.

The invention has for its object to provide a device with a circuit arrangement with one or more inductive elements which can be manufactured as economically as possible.

The object is achieved by means of an electrically conductive plate having an inductive function, which inductive function corresponds to a structure of slits formed in the plate.

Inexpensive electrically conductive plates are available, for example, as plates made of sheet metal. The structure of slits can be provided by means of a simple stamping operation, so that one or more inductive elements can be manufactured by means of a single plate element. The structure of slits, however, can also be formed, for example by milling, by laser treatment or also by etching. Furthermore, the use of a single plate for the inductive elements also allows for a flat and compact (modular) construction of the device in accordance with the invention. Furthermore, a plate of this kind is easy to handle and the number of external connections is reduced in comparison with a situation where use is made of separate coils with coil formers. The plate, however, can also be mounted separately on other parts of the device, for example, on the wall of a housing. Using plates of this kind, inductances can be formed which satisfy severe requirements as regards tolerances, that is, notably a plurality of identical inductances. Furthermore, a plate of this kind may also perform a cooling function. The magnetic coupling between the windings formed by means of the structure of slits can be readily influenced by choosing suitable distances between the windings.

The structure of slits is provided in particular in the form of one or more spiral-shaped slits. A number of coil windings which corresponds to the number of slits can thus be formed. In order to contact the coils it is proposed to provide the spiral-shaped slits with a respective contact point in their central region. Additionally, one or more contact

points can be provided adjacent the spiral-shaped slits. The contact points situated outside the spiral-shaped slits are then short-circuited by the electrically conductive plate; selection of a plurality of external contact points then enables a current distribution among a plurality of contact points in order to reduce losses and to avoid overloading of individual contact points. It is also possible to provide contact points as further tapping points between the contact points situated in the central regions and the outer edges of the slits. The electrically conductive plate in accordance with the invention can also be used to form inductances merely by means of contact points provided in the central regions of the slits. In one embodiment of the invention the electrically conductive plate is arranged on a printed circuit board and electrically connected to the circuit on the printed circuit board. In order to avoid any undesirable short-circuits between the printed circuit and the electrically conductive plate, in one embodiment of the device in accordance with the invention an insulating layer is provided between the printed circuit board and the electrically conductive plate. In a further embodiment of the invention a layer of a magnetic material, notably a ferrite material, is provided on at least one side of the electrically conductive plate; this results in an increased inductance of the inductive elements provided by the conductive plate while a compact construction is maintained nevertheless. A layer of a magnetic material can be used to influence the complete structure of slits and possibly a plurality of corresponding structures of slits. The use of one or more layers of a magnetic material is attractive from a manufacturing point of view and is also economical.

A preferred application of the device in accordance with the invention is its use in a power supply device (converter). The invention can be advantageously used in particular in the case of multi-phase DC/DC converters, comprising a plurality of circuit branches with each time at least one inductance, one inductance, a plurality of inductances or also all inductances then being presented by the electrically conductive plate provided with a structure of slits.

Embodiments of the invention will be described in detail hereinafter with reference to the drawings. Therein:

Fig. 1 shows a device in accordance with the invention,

Fig. 2 shows a plate provided with a structure of slits in accordance with the invention,

Fig. 3 shows a power supply circuit for the device in accordance with the invention,

Fig. 4 shows a device in accordance with the invention which is provided with layers of a magnetic material,

Fig. 5 shows the construction of the plate provided with a structure of slits for the device shown in Fig. 4,

Fig. 6 shows a further embodiment of the device in accordance with the invention, and

Figs. 7 and 8 show further versions of the plate provided with a structure of slits in accordance with the invention.

The device 10 shown in Fig. 1 is provided with a circuit arrangement which comprises a circuit which is arranged on a printed circuit board (PCB) 11 and further components 12 which are separately soldered thereon and are situated on the upper surface of the printed circuit board 11. On the lower side of the printed circuit board 11 there is arranged an electrically conductive plate 13, an insulating layer 14 being provided between the electrically conductive plate 13 and the printed circuit board 11, said insulating layer 14 supporting further separate components 16 of the circuit arrangement in the present embodiment. The electrically conductive plate 13 of the present embodiment is constructed as a metal plate which is provided with a structure of slits as will be described in detail hereinafter.

In this case the plate 13 consists of a copper sheet but it may also be formed, for example, as an electrically conductive layer of a multilayer printed circuit board or as an electrically conductive layer provided on an arbitrary substrate.

Connection pieces 15, only one of which is shown in Fig. 1, serve to establish electrical connections between the plate 13 and the circuit of the printed circuit board 11. The connection pieces 15 in the present embodiment are constructed as bent portions of the plate 13 which extend through cut-outs in the insulating layer 14 and the printed circuit board 11 and are soldered to the circuit of the printed circuit board 11 on the upper side of the printed circuit board (soldering on the lower side of the printed circuit board (not shown) is also possible). The plate 13 in this case serves also as a cooling member for dissipating loss heat produced by electronic components of the device 10 to the environment.

Fig. 2 is a plan view of the plate 13. It is provided with a structure of slits with three spiral-shaped slits 20a, 20b and 20c which define spiral-like windings or tracks which have the same winding orientation and provide an inductive effect as coil windings, it being readily possible to form also different winding orientations; applications involving only a single spiral-shaped slit are also feasible. In the central region of the spiral-shaped slits 20a, 20b and 20c there is provided a respective contact point 21a, 21b and 21c. Furthermore, outside (above) the slits 20a, 20b and 20c there are provided contact points 22 which are arranged in a row and are short-circuited by the plate 13. Via the contact points 21a, 21b and 21c and one of the contact points 22, the plate 13 is electrically connected to the circuit arrangement on the printed circuit board 11 via the connection pieces 15 in Fig. 1. The plate 13 in this case performs the function of three coils. A sub-structure formed by each of the slits 20a, 20b and 20c corresponds to a respective coil; this means that an inductance which corresponds to the slit 20a can be derived between the contact point 21a and the contact points 22; the same holds for the other two contact points 21b and 21c and the other slits 20b and 20c, respectively. Currents flowing into the plate 13 via the inner contact points 21a, 21b and 21c follow a spiral-shaped path and hence produce inductive effects from the respective inner contact point towards the outside and to the contact point 22 used.

Fig. 3 shows a preferred embodiment of a circuit arrangement which is realized by means of the device shown in Fig. 1 and the plate shown in Fig. 2. Fig. 3 shows a multi-phase DC/DC converter 30; this means that the device 10 of Fig. 1 constitutes a power supply device provided with such a converter circuit. The input of the converter 30 receives the input DC voltage  $V_i$  which is stepped down to an output DC voltage  $V_o$  by the converter 30. The converter 30 processes the input voltage  $V_i$  in a multi-phase fashion, that is, the input voltage  $V_i$  is processed in parallel by  $n$  DC step-down converters  $P_1, P_2 \dots P_n$ , where  $n = 3$ , the outputs of which are connected parallel to an output capacitance  $C_o$  and hence parallel to the output of the converter 30, and whose switching transistors operate in a phase-shifted fashion. The DC step-down converters comprise as usual a respective control transistor (transistors  $T_{1c} \dots T_{nc}$ ), a switched rectifier (transistors  $T_1 \dots T_n$ ) and an inductance ( $L_1 \dots L_n$ ), the inductances being provided by coils in conventional converters. In the proposed embodiment in accordance with the invention the three inductances  $L_1, L_2$  and  $L_3$  are formed by means of the plate 13 provided with the structure of slits as shown in Fig. 2, the spiral-shaped slit 20a forming the inductance  $L_1$ , the slit 20b the inductance  $L_2$  and the slit 20c the inductance  $L_3$ . The contact point 21a is then connected to the transistors  $T_{1c}$  and  $T_1$ , the contact point 21b being connected to the transistors  $T_{2c}$  and  $T_2$  while the contact point 21c is

connected to the transistors  $T_{3C}$  and  $T_3$ . A connection to the output capacitance  $C_0$ , and hence the converter output, is established by means of one of the contact points 22.

Multi-phase converters as shown in Fig. 3 are suitable in particular for power supply devices which are referred to as VRMs (voltage regulator modules) and are intended for fast processors of personal computers with a high clock frequency; in addition to a compact construction they enable in particular a fast changing of loads. The comparatively small inductances  $L_1 \dots L_n$  required can be formed by means of a plate provided with a structure of slits as shown in Fig. 3 and a high DC carrying capacity can be adjusted by adaptation of the thickness of the plate 13.

Figs. 4 and 5 show a version 10' of the device 10. Instead of arranging the plate 13 with the structure of slits directly on the lower side of the insulating layer 14 as shown in the Figs. 1 and 2, a plate 13' which is provided with a structure of slits consisting of three spiral-shaped slits 20a', 20b' and 20c' as shown in Fig. 2 is now arranged between two layers 40 and 41 of a magnetic material (possibly at a distance and separated by further insulating layers between the plate 13' and the layers of magnetic material in order to reduce (proximity) losses), said three layers being provided on the lower side of the insulating layer 14. Ferrite is preferably used as the magnetic material intended to increase the inductances that can be generated by means of the plate 13'. The layers of magnetic material also serve for electromagnetic shielding and for reducing interference radiation to the environment. In order to close the magnetic circuits for the inductances produced by means of the slits 20a', 20b' and 20c', the plate 13' is provided with cut-outs 50 to 56 where through pieces of magnetic material project so as to conduct magnetic fluxes between the layers of magnetic material 40 and 41 and to close the relevant magnetic circuit. The cut-outs 50, 51 and 52 are all provided in the respective central region of the slits 20a', 20b' and 20c'. Two further cut-outs 53 and 54 are situated between the slits 20a' and 20b' and between the slits 20b' and 20c', respectively. The cut-out 55 is situated opposite the cut-out 53 on the other side of the slit 20a'. The cut-out 56 is situated opposite the cut-out 54 on the other side of the slit 20c'. The ferrite layers 40 and 41 and the plate 13' in this case additionally act as cooling elements for dissipating loss heat from electronic components of the device 10' to the environment.

In conformity with the relevant application, the embodiment shown in Fig. 4 can be modified in such a manner that only one layer of a magnetic material is used. Analogously, the cut-outs 50 to 56 in the printed circuit board 13', traversed by a magnetic material, are also optional and not required for all feasible applications.

Fig. 6 shows a further embodiment. A device 60 comprises a printed circuit board 61 with circuit components on the upper side and the lower side; components 62 are shown, by way of example, on the lower side and components 63 on the upper side, the components 63 (being in particular the switching transistors used in the case of switched converters as shown in Fig. 3) producing such a large amount of loss heat that cooling by dissipation of heat to the ambient atmosphere per se is not adequate, so that additional cooling is required. This additional cooling is provided by a cooling arrangement 64 which consists of one or more layers of a suitably thermally conductive material which is in this case bonded to the printed circuit board 61 by way of a prepreg bond. The reference numeral 65 denotes the prepreg layer used. The reference numeral 66 denotes an adhesive which fills clearances between the cooling arrangement 64 and the printed circuit board 61 with the prepreg layer 65 and the components 63. The cooling arrangement 64 in the embodiment shown in Fig. 6 consists of two layers of ferrite 67 and 68 wherebetween there is arranged a suitably electrically conductive plate 69 which is provided with a structure of slits, has an inductive function and is built like the plate 13' of Fig. 5.

In a further version of the embodiment of Fig. 6 (not shown) a printed circuit board arrangement with components to be cooled is arranged not only on the lower side of the cooling arrangement 64 but also on the oppositely situated (upper) side of the cooling arrangement 64.

In the further version of an electrically conductive plate 70 in accordance with the invention which is shown in Fig. 7 and is constructed notably as a metal plate, there are provided two spiral-shaped slits 71 and 72 which constitute two corresponding spiral-shaped coil windings which have the same winding orientation in this case, but opposed winding orientations are also feasible. The coil winding formed by the slit 71 is provided with a contact point 73 in its central region and with a further contact point 74 in the region between the central region and the outer segment of the slit 71, which further contact point is provided for an additional tapping. The coil winding formed by the slit 72 is provided with a contact point 75 in its central region and with a further contact point 76 in the region between the central region and the outer segment of the slit 72; this contact point is also provided for an additional tapping. Like in the preceding examples, further contact points 77 are provided adjacent the coil windings formed by the slits 71 and 72. Further possibilities for the realization of inductances are created by way of further contact points serving for tapping.

Fig. 8 shows a further version of an electrically conductive plate 80 in accordance with the invention which comprises two spiral-shaped slits 81 and 82 for forming



coil windings which have an opposed winding orientation in this case, but winding orientations in the same direction are also feasible. Contact points are provided only in the two central regions of the slits 81 and 82, that is, the slit 81 comprises a central contact point 83 and the slit 82 comprises a central contact point 84. The number of contact points is thus reduced to a minimum.

## CLAIMS

1. A device which comprises a circuit arrangement and an electrically conductive plate having an inductive function, which inductive function corresponds to a structure of slits formed in the plate.
2. A device as claimed in claim 1, characterized in that the structure of slits is formed by one or more spiral-shaped slits.
3. A device as claimed in claim 2, characterized in that the spiral-shaped slits are provided with a respective contact point in their central region and/or that at least one further contact point is arranged adjacent the spiral-shaped slits and/or between the central region and the periphery of a spiral-shaped slit.
4. A device as claimed in claim 3, characterized in that there is provided a printed circuit board which supports the circuit arrangement and is electrically coupled to the electrically conductive plate by way of the contact points.
5. A device as claimed in claim 4, characterized in that the printed circuit board supports the electrically conductive plate.
6. A device as claimed in one of the claims 1 to 5, characterized in that the electrically conductive plate has the function of a plurality of coils, the number of which corresponds to the number of spiral-shaped slits.
7. A device as claimed in one of the claims 1 to 6, characterized in that the electrically conductive plate is formed as a sheet of metal.
8. A device as claimed in claim 7, characterized in that an insulating layer is provided between the printed circuit board and the electrically conductive plate.

9. A device as claimed in one of the claims 1 to 8, characterized in that a layer of a magnetic material, notably a ferrite material, is provided on at least one side of the electrically conductive plate.
10. A device as claimed in claim 9, characterized in that there is provided an arrangement which comprises two layers of a magnetic material wherebetween the electrically conductive plate is arranged, on one outer side of the arrangement there being provided a printed circuit board which is electrically coupled to the electrically conductive plate.
11. A device as claimed in one of the claims 4 to 10, characterized in that there is provided a cooling layer which consists of a suitably thermally conductive material, notably metal, and that components of the device which are to be cooled are arranged between the cooling layer and the printed circuit board.
12. A device as claimed in one of the claims 4 to 10, characterized in that either the electrically conductive plate or the layer of a magnetic material is used for cooling.
13. A power supply device which includes a device as claimed in one of the claims 1 to 12.
14. A power supply device as claimed in claim 13, characterized in that the electrically conductive plate serves to form inductances of a multi-phase converter.
15. An electrically conductive plate having an inductive function, the inductive function corresponding to a structure of slits formed in the plate.
16. An electrically conductive plate as claimed in claim 15, characterized in that the structure of slits is formed by spiral-shaped slits.

1/4

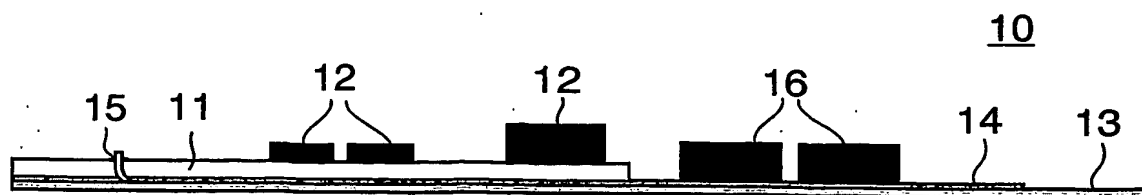


FIG. 1

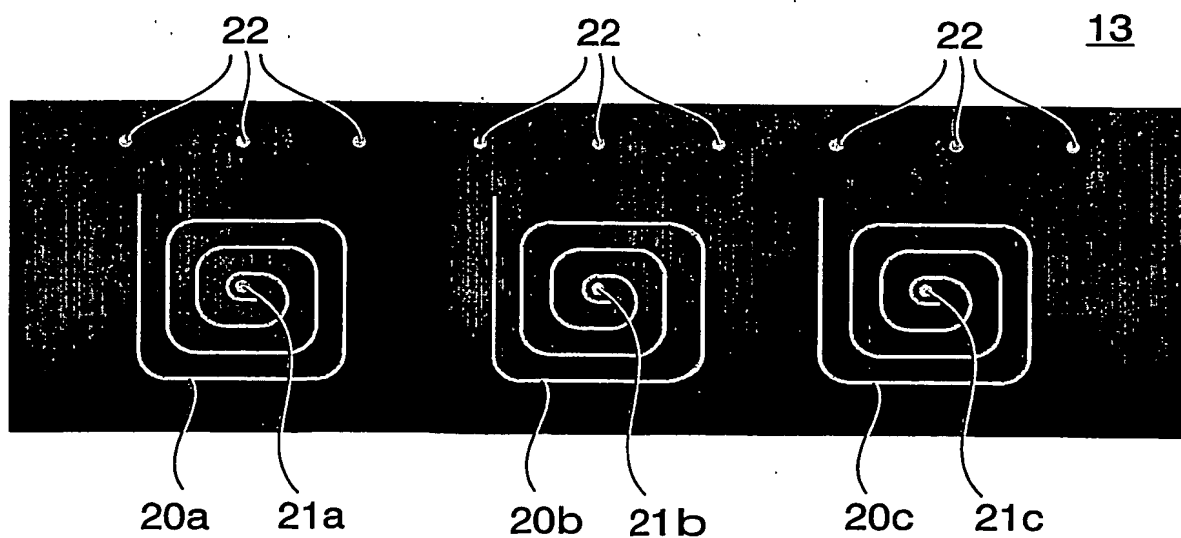


FIG. 2

2/4

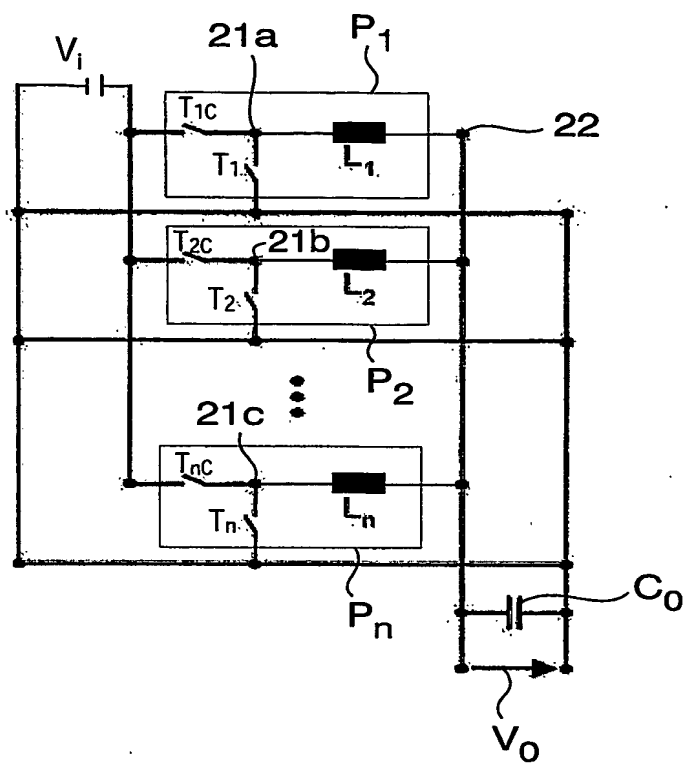


FIG. 3



FIG. 4

3/4

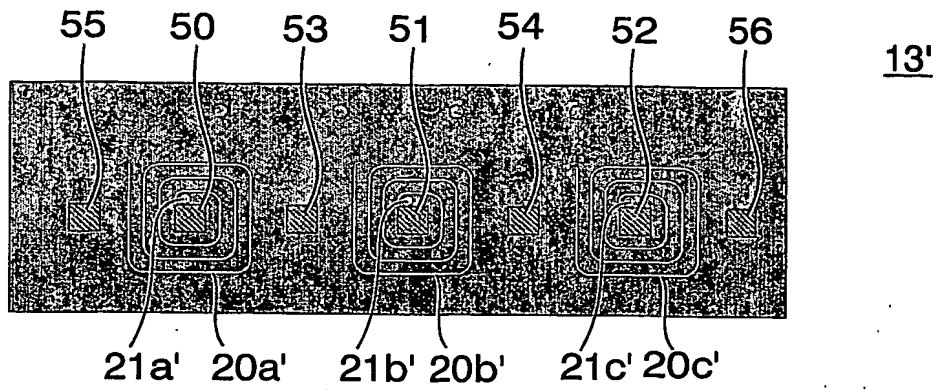


FIG. 5

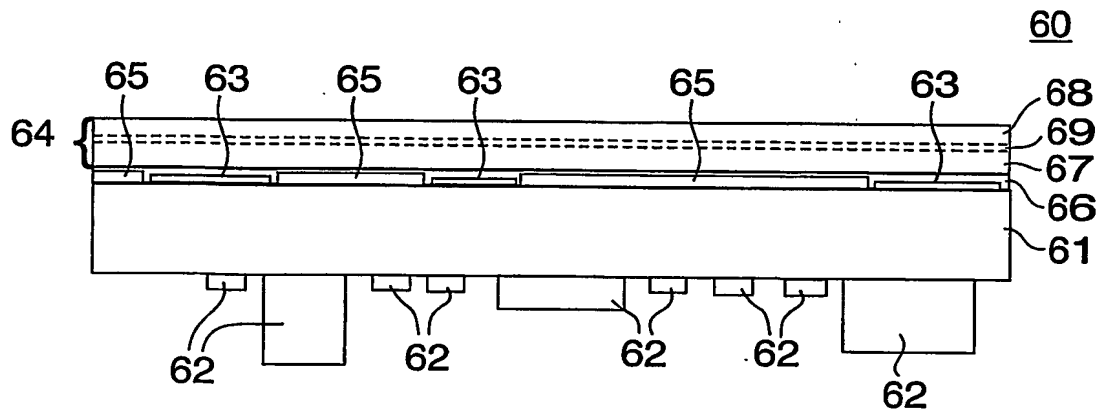


FIG. 6

4/4

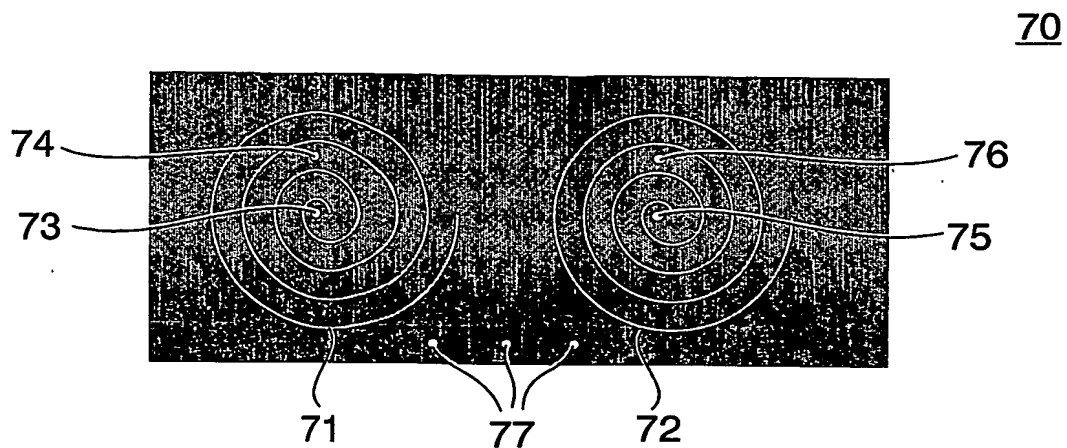


FIG. 7

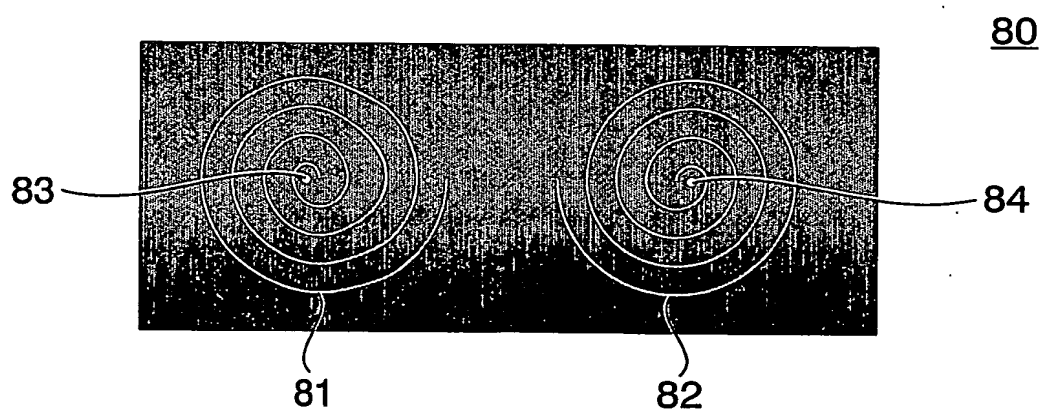


FIG. 8

## INTERNATIONAL SEARCH REPORT

 International Application No  
 PC 03/03237

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01F27/28 H01F5/00 H02M3/00 G06F1/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01F H02M G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	NAKAZAWA H ET AL: "MICRO-DC/DC CONVERTER THAT INTEGRATED PLANAR INDUCTOR ON POWER IC" IEEE TRANSACTIONS ON MAGNETICS, IEEE INC. NEW YORK, US, vol. 36, no. 5, September 2000 (2000-09), pages 3518-3520, XP001020137 ISSN: 0018-9464 abstract page 3518, left-hand column, paragraph 2; figure 1 page 3520, left-hand column, line 8-19; figure 4 --- -/--	1-5,9, 10,13-16

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

14 November 2003

Date of mailing of the international search report

28/11/2003

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Reder, M



## INTERNATIONAL SEARCH REPORT

International Application No  
PCT 03/03237

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>HOFSAJER I W ET AL: "Integrated technology and performance for multi-kilowatt power electronic converters—an evaluation" INDUSTRIAL ELECTRONICS, CONTROL, AND INSTRUMENTATION, 1993. PROCEEDINGS OF THE IECON '93., INTERNATIONAL CONFERENCE ON MAUI, HI, USA 15-19 NOV. 1993, NEW YORK, NY, USA, IEEE, 15 November 1993 (1993-11-15), pages 779-784, XP010109124 ISBN: 0-7803-0891-3 abstract page 779, right-hand column, last paragraph -page 780, left-hand column, paragraph 2</p>	1,7,9, 13,15
X	<p>US 5 621 636 A (HIRANO HOSEI ET AL) 15 April 1997 (1997-04-15) abstract column 2, line 66 -column 3, line 10; figure 1B column 4, line 11-27; figure 2A</p>	1,2,4,9, 13,15
X	<p>DE 87 11 808 U (BLAUPUNKT-WERKE GMBH) 15 October 1987 (1987-10-15) page 1, line 19 -page 2, column 4 page 3, line 30 -page 4, line 3 figures 2,3</p>	1-5,9, 13,15,16
X	<p>EP 1 041 587 A (SIEMENS AG) 4 October 2000 (2000-10-04) abstract; figure 1 paragraphs '0006!', '0007!</p>	15,16
X	<p>EP 0 671 800 A (NIPPON DENSO CO) 13 September 1995 (1995-09-13) abstract; figure 1 column 2, line 40-58</p>	15,16
X	<p>PATENT ABSTRACTS OF JAPAN vol. 1998, no. 11, 30 September 1998 (1998-09-30) &amp; JP 10 163039 A (TDK CORP), 19 June 1998 (1998-06-19) abstract; figures 1,2</p>	15,16
X	<p>EP 0 522 475 A (ABB PATENT GMBH) 13 January 1993 (1993-01-13) abstract column 3, line 28-35; figures 5,6</p>	15,16
	-/--	

## INTERNATIONAL SEARCH REPORT

Internat. Application No.  
PCT/ 03/03237

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 073 339 A (LEVIN GEDALY) 13 June 2000 (2000-06-13) column 7, line 55 -column 8, line 10; figures 4-8,14 ---	15,16
X	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 12, 25 December 1997 (1997-12-25) & JP 09 219326 A (MATSUSHITA ELECTRIC IND CO LTD), 19 August 1997 (1997-08-19) abstract; figures 1-4 -----	15,16

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International

Application No

PC 03/03237

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5621636	A	15-04-1997	JP 7023559 A JP 7263254 A JP 7288213 A	24-01-1995 13-10-1995 31-10-1995
DE 8711808	U	15-10-1987	DE 8711808 U1	15-10-1987
EP 1041587	A	04-10-2000	AT 228713 T DE 50000804 D1 DK 1041587 T3 EP 1041587 A1 ES 2188473 T3 PT 1041587 T	15-12-2002 09-01-2003 24-03-2003 04-10-2000 01-07-2003 31-03-2003
EP 0671800	A	13-09-1995	AU 676944 B2 AU 7707594 A DE 69411145 D1 DE 69411145 T2 EP 0671800 A1 JP 3041956 B2 KR 206356 B1 CA 2147251 A1 CN 1115193 A WO 9509474 A1 TW 487247 Y US 6076251 A	27-03-1997 18-04-1995 23-07-1998 22-10-1998 13-09-1995 15-05-2000 01-07-1999 06-04-1995 17-01-1996 06-04-1995 11-05-2002 20-06-2000
JP 10163039	A	19-06-1998	NONE	
EP 0522475	A	13-01-1993	DE 4122796 A1 AT 138493 T DE 59206342 D1 EP 0522475 A1	21-01-1993 15-06-1996 27-06-1996 13-01-1993
US 6073339	A	13-06-2000	AU 7955098 A WO 9854733 A2	30-12-1998 03-12-1998
JP 09219326	A	19-08-1997	JP 3269371 B2	25-03-2002